


CT 300.09

Electronic engine indicating system for CT 300

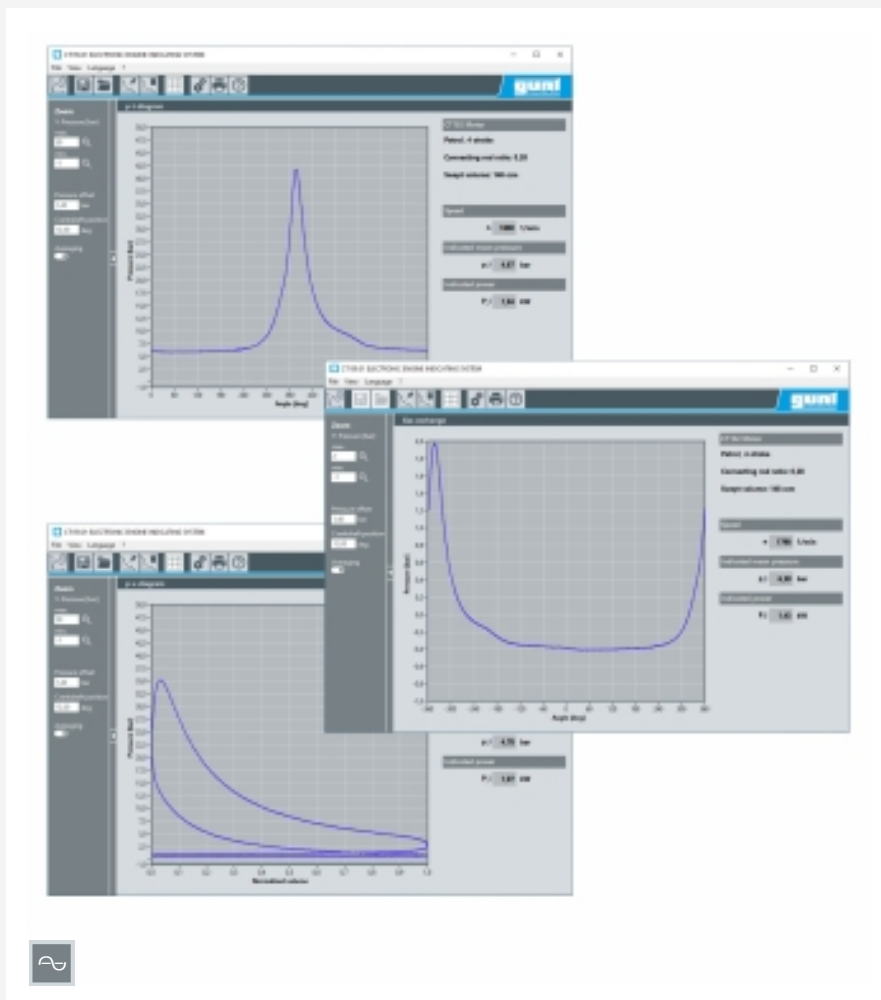

The illustration shows: p-t diagram, pressure curve for gas cycle, p-V diagram

Description

- cylinder pressure indication system, suitable for CT 300.04 and CT 300.05 engines

Indicating systems can be used for a thermodynamic analysis of engines. In industrial applications, these systems are used to optimise the combustion process.

The system is used in conjunction with the pressure transducer CT 300.17 or CT 300.18. It allows pressure measurements to be carried out in the cylinder head of an internal combustion engine and is designed for the CT 300.04 and CT 300.05 engines. The data is transferred to a PC for further processing. The software produces p-t and p-V diagrams, and also displays the average pressure and the indicated power output.

The system consists of a software and a measuring amplifier for the pressure transducer and TDC sensor.

Learning objectives/experiments

- familiarisation with and use of an electronic cylinder pressure indication system
- p-t diagram
- p-V diagram
- pressure curve for gas cycle
- determination of indicated power output from p-V diagram

Specification

- [1] cylinder pressure indication system for internal combustion engine
- [2] only to be used in conjunction with CT 300.17 or CT 300.18 transducers
- [3] chronological representation of pressure curve against the crank angle in p-t diagram to determine the maximum pressure and to monitor the ignition point and the pressure increase
- [4] representation of pressure curve against the standardised piston capacity in p-V diagram to determine the indicated power output
- [5] system consists of measuring amplifier, software and a TDC sensor
- [6] GUNT software for data acquisition via USB under Windows 11

Technical data

Measuring amplifier

- amplification factor: 10mbar/mV

TDC sensor trigger distance

- 1mm

230V, 50Hz, 1 phase

230V, 60Hz, 1 phase

120V, 60Hz, 1 phase

UL/CSA optional

LxWxH: 280x260x120mm (measuring amplifier)

Weight: approx. 5kg

Required for operation

PC with Windows

Scope of delivery

- 1 measuring amplifier
- 1 set of accessories
- 1 GUNT software + USB cable

CT 300.09

Electronic engine indicating system for CT 300

Required accessories

CT 300 Engines with	Engine test stand, 11kW
or	
CT 300.04 with	Two-cylinder petrol engine for CT 300
CT 300.17 or	Pressure transducer for CT 300.04
CT 300.05 with	Two-cylinder diesel engine for CT 300
CT 300.18	Pressure transducer for CT 300.05